

92.438 STAPLES 92 (18GA)

USE GENUINE OMER FASTENERS
P_{s max} : 7,5 bar (105 PSI)

Crown: .334"

1,00x1,25


15 - 5/8"
40 - 1-9/16"

3ET92438

omer s.p.a.
Via Foresto, 42 - 31058
SUSEGANA (TV) ITALY

3ETCE

WARNING
1. Read and understand tool labels and manual.
Failure to follow warnings could result in DEATH or SERIOUS INJURY.
2. Operators and others in the work area
MUST wear safety glasses with side shields.
3. Keep fingers AWAY from the trigger when
not driving fasteners to avoid accidental firing.
4. Choice of trigger systems is important.
Check manual for triggering options.
5. NEVER point tool at your self or others in work area.
6. NEVER use oxygen or other bottled gasses. Explosion may occur.

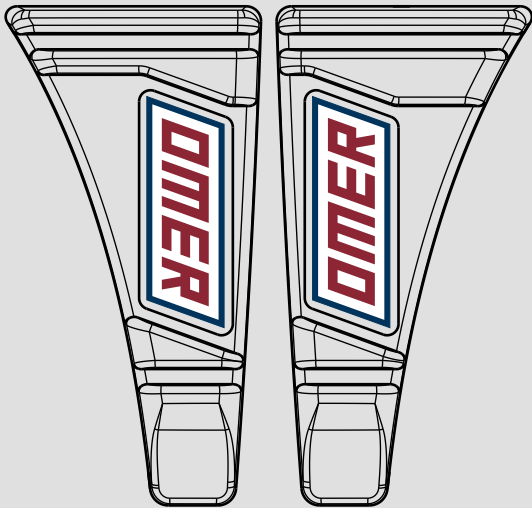

3ET99

3ETS1

3ET95

2007042L

2007042R


Azionamento - Actuation - Auslösung - Actionnement - Accionamiento - Ενεργοποίηση
Acionamento - Activering - Çalıştırma - Aktivierung - Spuštění - Spustenie

Azionamento a contatto


Contact actuation



81.44

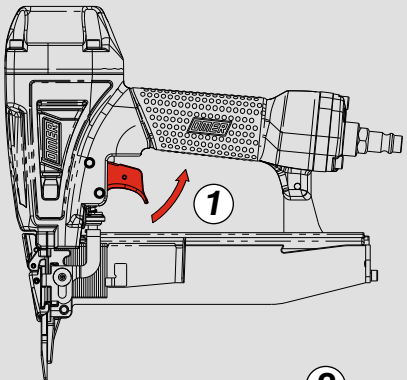

Oppure - Or


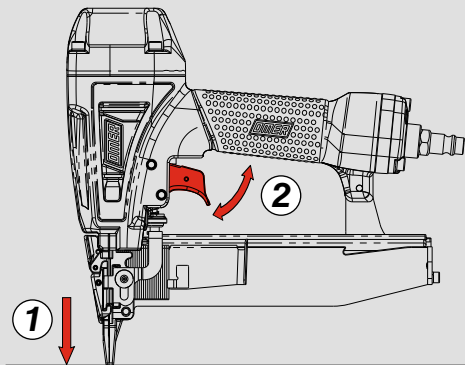


Azionamento sequenziale singolo

Single sequential actuation



81.44.1

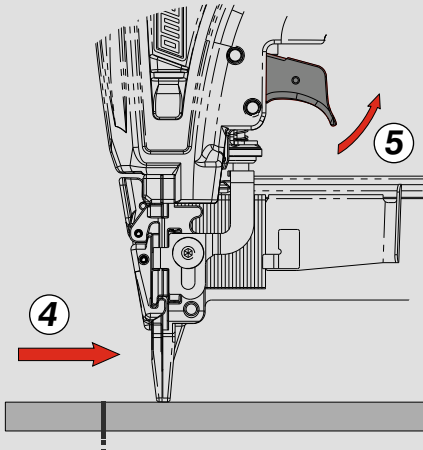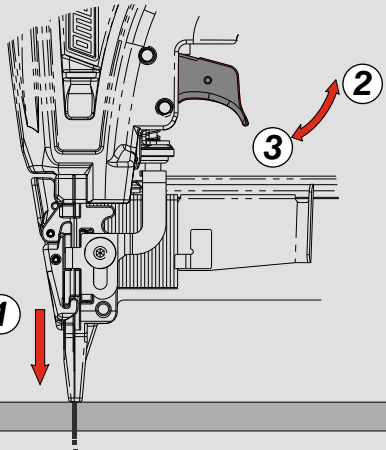

OMER®

Manuale d'uso, manutenzione e parti di ricambio

Manual for use, maintenance and spare parts

Bedienungs- und Wartungshandbuch sowie Ersatzteilliste

Mode d'emploi, de maintenance et pièces de rechange

Manual de uso, mantenimiento y recambios

Εγχειρίδιο χρήσης, συντήρησης και ανταλλακτικών

Manual de uso, manutenção e peças sobresselentes

Handleiding voor gebruik, onderhoud en wisselstukken

Kullanım, bakım ve yedek parça kılavuzu

Användar-, underhålls- och reservdelshandbok

Návod k používání a údržbě a náhradní díly

Návod na obsluhu, údržbu a náhradné diely

Parte 2

Part 2

Teil 2

Partie 2

Part 2

Μέρος 2

Parte 2

Deel 2

Kısım 2

Del 2


Část 2

Čast 2



92.438

cod. 1447240



Warning: Please read the instructions and warnings for this tool carefully before use. Failure to do so could lead to serious injury.

Dati tecnici

Technical data
Technische Daten
Tehniska data

Caractéristiques techniques

Datos técnicos
Τεχνικά χαρακτηριστικά
Technické údaje

Dados técnicos

Technische gegevens
Teknik veriler
Technické údaje

Misure impiegabili

Lenghts
Verwendbare Nagellänge
Dimensioner som kan användas

Dimensions utiles
Medidas de longitud
Μήκος Αναλωσίμου
Prípustné rozměry

Medidas utilizáveis
Toepasbare afmetingen
Boy
Použitelné rozmery

mm

15÷40

inch

5/8"÷1-9/16"

Capacità caricatore n° punti

Magazine capacity
Magazinkapazität Nägel
Magasínkapacitet Antal punkter

Capacité chargeur n° de points
Capacidad cargador n° puntos
Δυνατότητα γεμιστέρα
Kapacita zásobníku p. sponek

Capacidade carregador n° pontos
Capaciteit magazijn in aantal spijkers
Dergi kapasitesi
Kapacita zásobníka p. spôn

115

Pressione d'esercizio

Operating pressure
Betriebsdruck
Drifttryck

Pression d'exercice
Presión de servicio
Πίεση λειτουργίας
Pracovní tlak

Pressão de serviço
Werkdruk
Çalışma basıncı
Prevádzkový tlak

bar

5÷7,5

psi

70÷105

Consumo aria

Air consumption
Luftverbrauch
Luftförbrukning

Consommation d'air
Consumo aire
Κατανάλωση αέρα
Spotřeba vzduchu

Consumo ar
Luchtverbruik
Hava tüketimi
Spotřeba vzduchu

lt/colpo

0,50

ft³/cycle

0,0176

Peso

Weight
Gewicht
Vikt

Poids
Peso
Βάρος
Hmotnost

Peso
Gewicht
Ağırlık
Hmotnost

kg

1,25

lbs

2,75

Dimensioni

Dimensions
Abmessungen
Dimensioner (AxHxH)

Dimensions
Dimensiones
Διαστάσεις
Rozměry

Dimensões
Afmetingen
Boyutlar
Rozměry

mm

247x64x246

inch

9-3/4"x2-1/2"x9-23/32"

(LxWxH)

EN 12549 :2009 EN ISO 4871 :2009

Pressione sonora in pos. operatore

Sound pressure in operator's position
Schalldruck am Arbeitsplatz
Ljudtryck på operatörsplatsen

Pression sonore poste Opérateur
Presión sonora en la pos. del operador
Ηχητική πίεση στη θέση του χειριστή
Akustický tlak v místě obsluhy

Pressão sonora na posição Operador
Geluidsdruk op de werkplaats
Οπράτορ ποζισιοννδα ses basıncı
Akustický tlak v mieste obsluhy

dB(A)

86

(K= 4 dB)

EN 12549 :2009 EN ISO 3746 :2011 EN ISO 4871 :2009

Potenza sonora emessa

Sound power emitted
Emitierte Schalleistung
Avgiven ljudeffekt

Puissance sonore émise
Potencia sonora emitida
Εκπεμπόμενη ηχητική ισχύς
Emitovaný akustický tlak

Potência sonora emitida
Geëmitteerd geluidsvermogen
Çıkan ses gücü (ses desibeli)
Výstupný akustický výkon

dB(A)

94

(K= 4 dB)

CEN ISO/TS 8662-11 :2006 EN ISO 5349-2 :2004 EN 12096 :1999

Emissione vibratoria sull'impugnatura

Vibratory emissions on handle
Vibrationsemission am Griff
Vibrationsemission på handtaget

Émission vibratoire sur la prise en main
Emisión de vibraciones en la empuñadura
Εκπεμπόμενες δονήσεις στη λαβή
Emise vibrací na rukojet

Emissão vibratória na empunhadura
Trillingsemissie op de handgreep
Tutamak üzerinde vibrasyon emisyonları
Emisie vibrácií na rukováti

m/s²

3,10

(K= 2 m/s²)

Tipo di punto

Type of fastener
Befestigungsmittel
Type de rivet
Tipo de punto
Τύπος αναλωσίμου
Tipo de agraf
Type nietjes
Zimba ve çivi tipleri
Typ av stygn
Typ sponky
Typ spony

92


1,00x1,25



Crown: .334" (5/16")

Gauge: 18

Parti di ricambio - Spare parts - Ersatzteile - Pièces de rechange - Recambios - Ανταλλακτικά
Partes sobresselentes - Wisselstukken - Yedek parçalar - Reservdelar - Náhradní díly - Náhradné diely

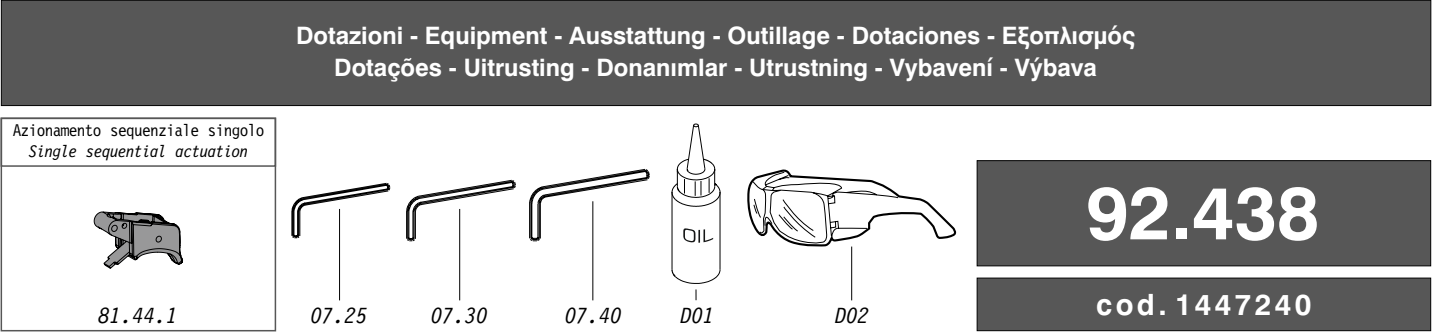

Parti di ricambio - Spare parts - Ersatzteile - Pièces de rechange - Recambios - Ανταλλακτικά
Partes sobresselentes - Wisselstukken - Yedek parçalar - Reservdelar - Náhradní díly - Náhradné diely

92.438

cod. 1447240

Indice di modifica


Upgrade number

4





Caricamento da sopra

Top load magazine

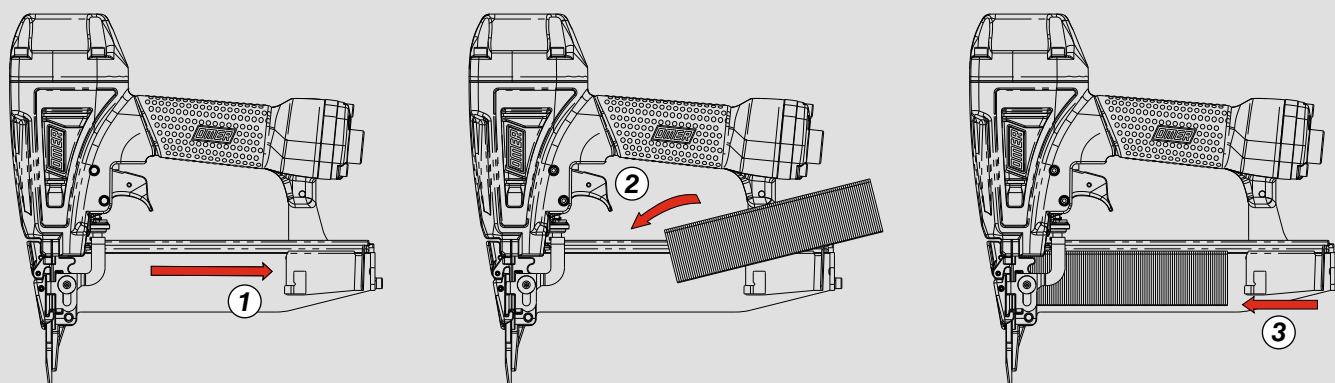

Disinceppamento - Jam clearing - Staubeseitigung - Décoincement - Desatascamiento - Απεμπλοκή
Desencravamento - Deblokkering bij vastlopen - Sıkışma giderme - Rensning av igensättningar - Uvoľnění - Uvoľnenie

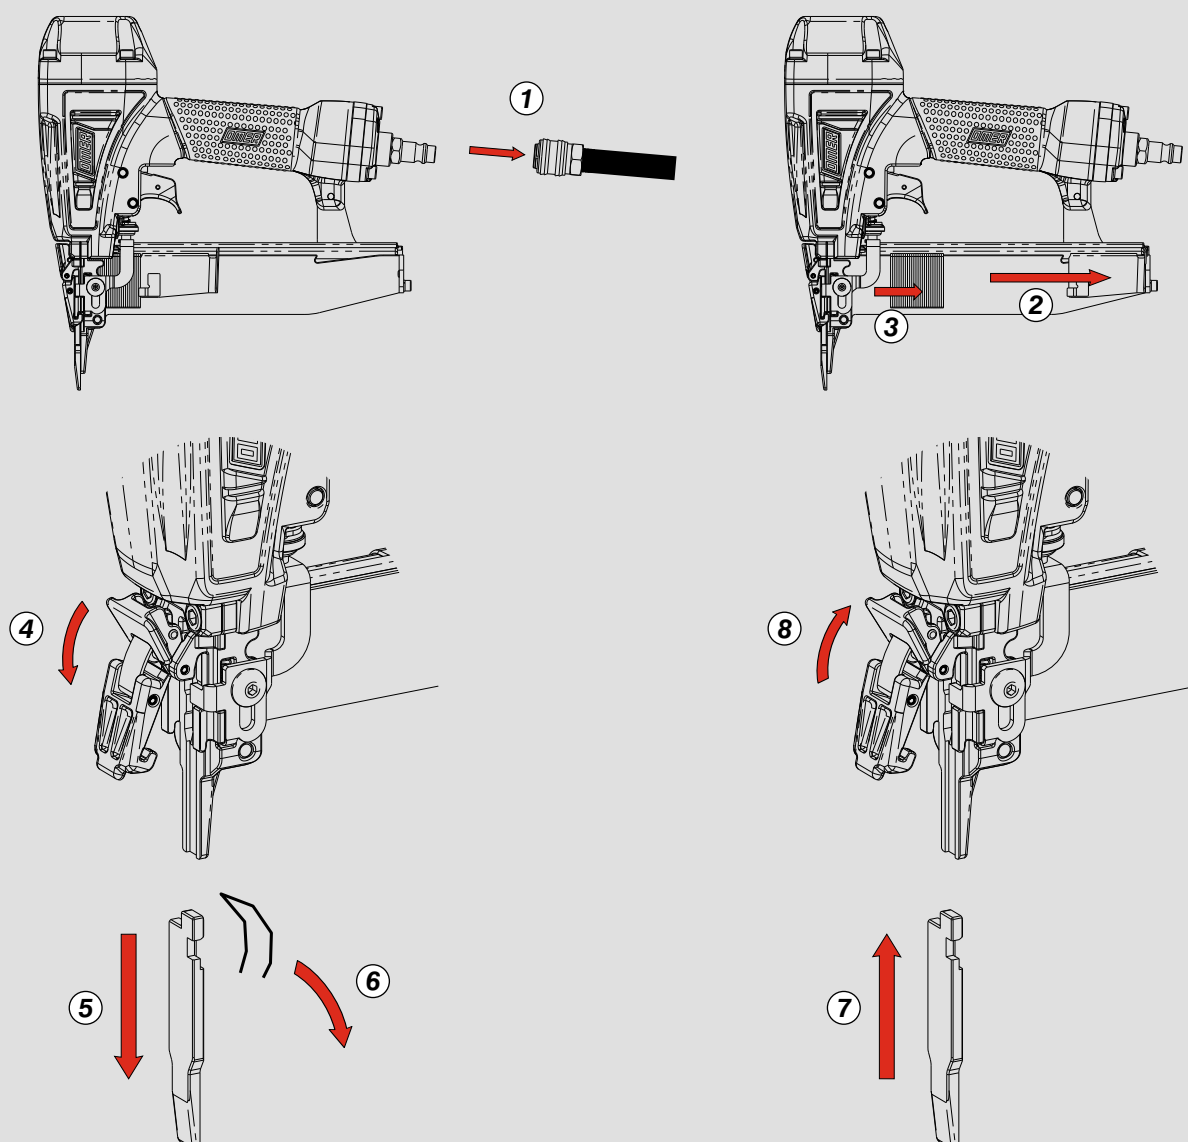

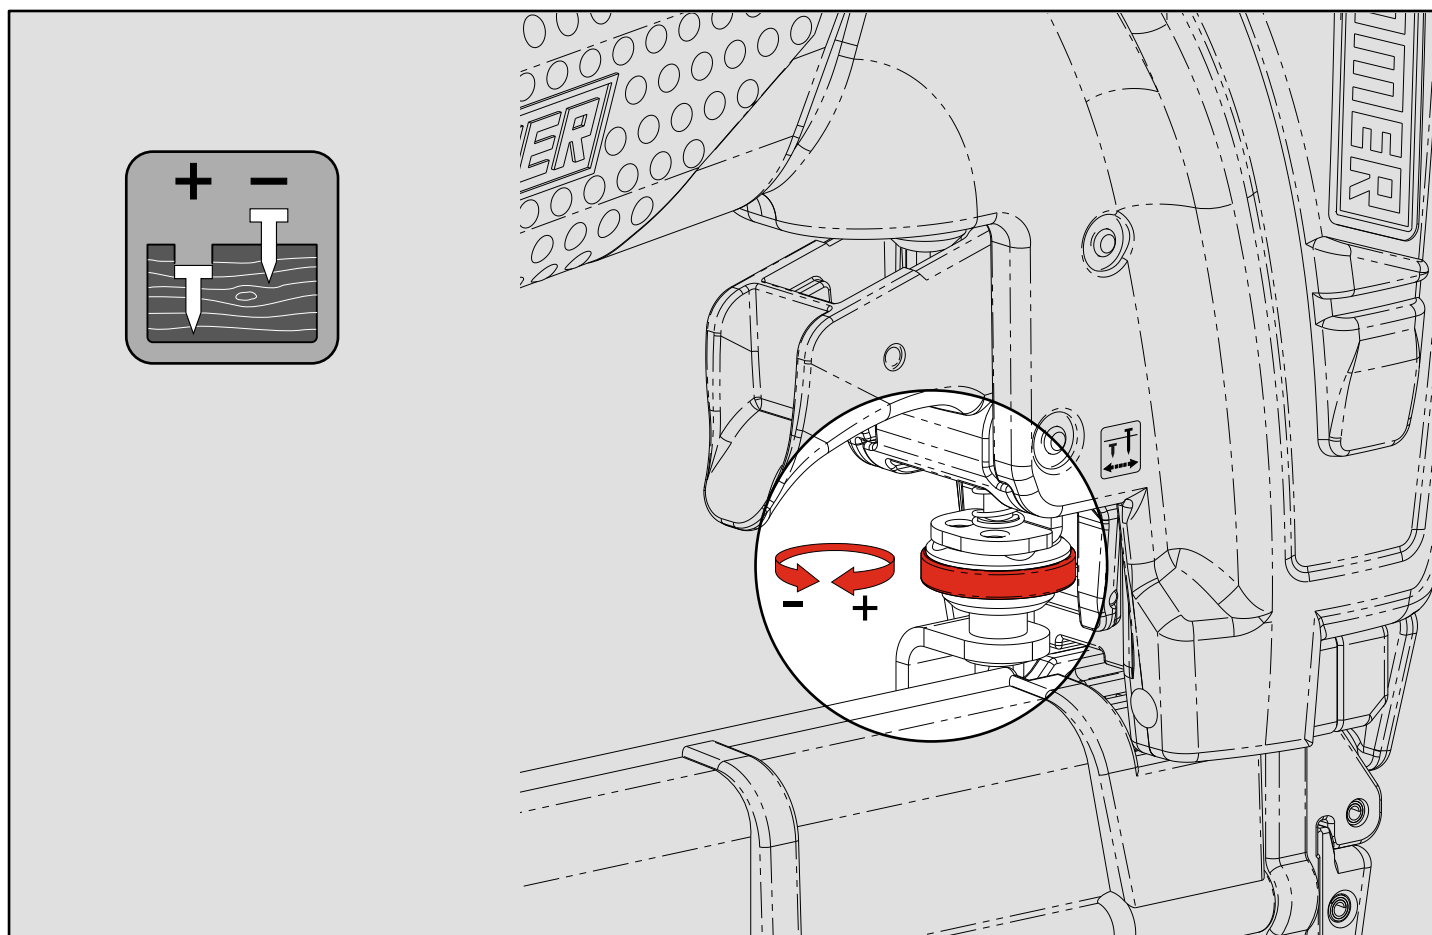

Caratteristiche - Features - Merkmale - Caractéristiques - Características - Χαρακτηριστικά
Características - Kenmerken - Özellikler - Vlastnosti - Vlastnosti

Dispositivo di blocco sparo a fine punti

Stop firing device on empty magazine

